

Locking plungers with and without safety variant



Locking plungers with and without key operation

News from Ganter in Furtwangen

Ganter of Furtwangen now offers locking plungers with and without safety variant. Two designs are available, both available with or without key operation.

If inoperative, the locking pin in the GN 816 locking plunger protrudes. To retract, it is moved against the spring force and held in the end position by a 90° turn.


If inoperative, the locking pin in the GN 816.1 locking plunger is retracted. To move out, it is also pushed against the spring force and held in the end position by a 90° turn.

The specially designed guide cam secures the locking pin in both design versions against inadvertent resetting.

The guide (threaded section) of the locking plunger is made of zinc-plated blue chromated steel, while the locking pin and the pressure spring are made of stainless steel. The mat black head and the cover sleeve are made of plastic (thermoplastic – polyamide PA) and are not detachable.

A key (GN 816-10 or GN 816.1-10) is required to move the locking pin in the locking plungers with safety variant. In addition, the cover sleeve prevents the unauthorised turning out of the locking plunger and also prevents malfunctions caused by dirt.

Find out more in in the internet at www.ganter-griff.com.

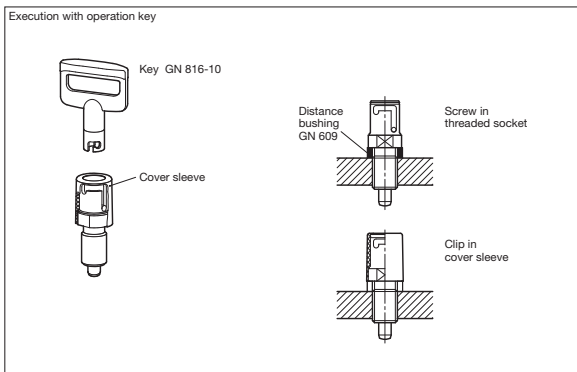

Assembly instructions GN 816

PRESS BOX



Ansprechpartner | *Contact*

Durchwahl | *direct extension*

E-Mail | *Email*

ELESA+GANTER

Phone +

Fax +

www.elsa-ganter.com