



WDS



WDS 850

Stainless Steel Gas Struts (Gas Springs) with Clevis Fork & Clevis Eye (WDS 850)

MATERIAL


Body - 316 Stainless Steel

Rod - 316 Stainless Steel

Adjusting Valve - Brass

Operating temperature of -25 to +60 degrees celsius

Adjustable Force - Supplied at maximum force to be adjusted in position to suit the specific application.

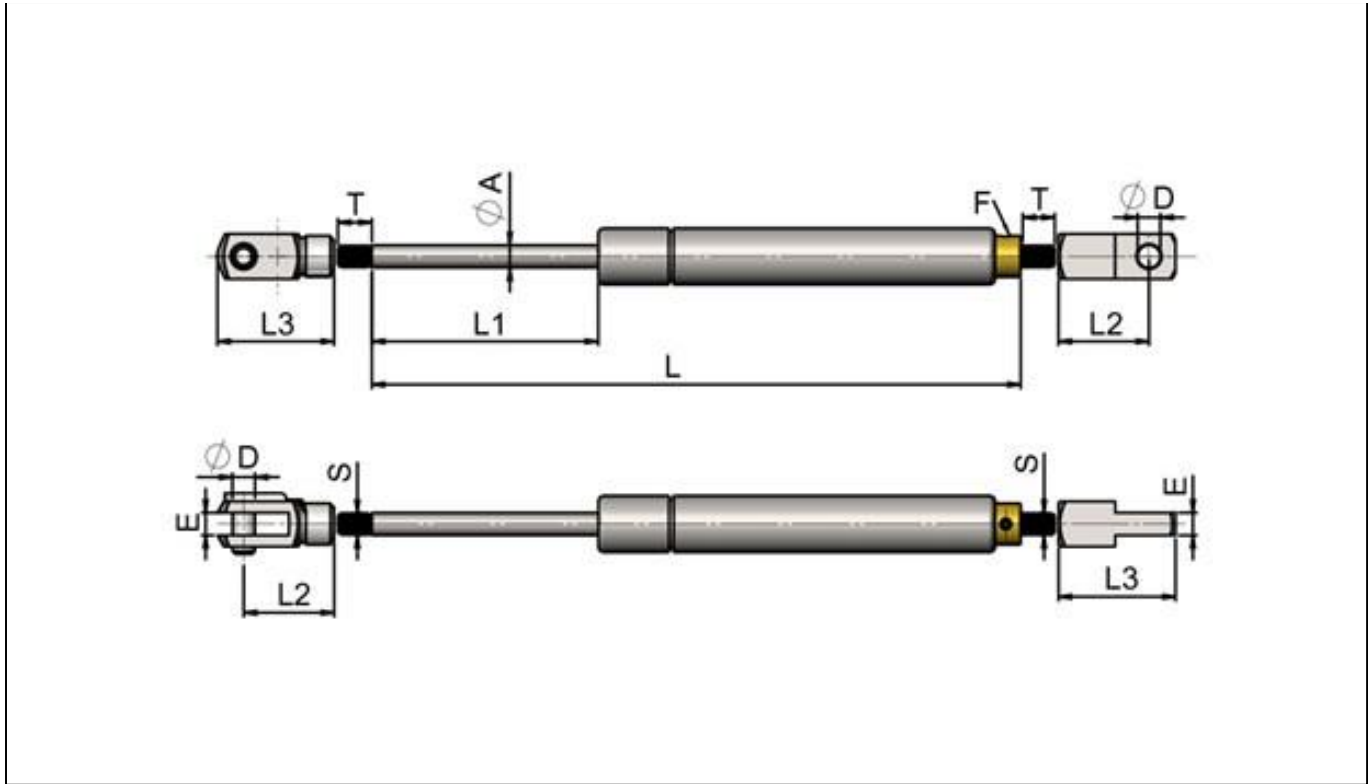

27 Sizes

WDS NO.	A	B	D	E	L	L1	L2	L3	S	T	Force Range (N)	Weight
850-0615040CE	6	15	6	6	132	40	24	31	M6x1.0	9	20-400	0.181
850-0615060CE	6	15	6	6	172	60	24	31	M6x1.0	9	20-400	0.206
850-0615080CE	6	15	6	6	212	80	24	31	M6x1.0	9	20-400	0.236
850-0615100CE	6	15	6	6	252	100	24	31	M6x1.0	9	20-400	0.266
850-0615120CE	6	15	6	6	292	120	24	31	M6x1.0	9	20-400	0.251
850-0615150CE	6	15	6	6	352	150	24	31	M6x1.0	9	20-400	0.296
850-0615200CE	6	15	6	6	452	200	24	31	M6x1.0	9	20-400	0.336
850-0819050CE	8	19	6	6	152	50	24	31	M6x1.0	9	50-700	0.386
850-0819075CE	8	19	6	6	202	75	24	31	M6x1.0	9	50-700	0.565
850-0819100CE	8	19	6	6	252	100	24	31	M6x1.0	9	50-700	0.62
850-0819125CE	8	19	6	6	302	125	24	31	M6x1.0	9	50-700	0.685

WDS NO.	A	B	D	E	L	L1	L2	L3	S	T	Force Range (N)	Weight
850-0819150CE	8	19	6	6	352	150	24	31	M6x1.0	9	50-700	0.805
850-0819175CE	8	19	6	6	402	175	24	31	M6x1.0	9	50-700	0.967
850-0819200CE	8	19	6	6	452	200	24	31	M6x1.0	9	50-700	1.187
850-0819250CE	8	19	6	6	552	250	24	31	M6x1.0	9	50-700	1.422
850-0819300CE	8	19	6	6	652	300	24	31	M6x1.0	9	50-700	1.642
850-1022100CE	10	22	8	8	257	100	32	42	M8x1.25	12	100-1200	1.642
850-1022150CE	10	22	8	8	357	150	32	42	M8x1.25	12	100-1200	1.642
850-1022200CE	10	22	8	8	457	200	32	42	M8x1.25	12	100-1200	1.642
850-1022250CE	10	22	8	8	557	250	32	42	M8x1.25	12	100-1200	1.642
850-1022300CE	10	22	8	8	657	300	32	42	M8x1.25	12	100-1200	1.642
850-1022400CE	10	22	8	8	857	400	32	42	M8x1.25	12	100-1200	1.642
850-1428100CE	14	28	10	10	254	100	40	52	M10x1.5	14	200-2500	1.642
850-1428200CE	14	28	10	10	454	200	40	52	M10x1.5	14	200-2500	1.642
850-1428300CE	14	28	10	10	654	300	40	52	M10x1.5	14	200-2500	1.642
850-1428400CE	14	28	10	10	854	400	40	52	M10x1.5	14	200-2500	1.642
850-1428500CE	14	28	10	10	1054	500	40	52	M10x1.5	14	200-2500	1.642

Registered in England No 6819551 | VAT Reg No: GB 945 9861 64